

How to use the Projector in B701

1 STEP ONE

CONFIRM THE AV RACK IS POWERED ON


Press the **POWER** (ON/STANDBY) button on the top AV Rack unit.
Please do not change any other settings in the AV Rack.



2 Tap the touch screen to wake up the system , and press the **ON** button on the remote control.

3 Connect your PC to the VGA, or HDMI* cable.
*Use the appropriate adapter if necessary.

4 Press the **HDMI** button on the remote control.

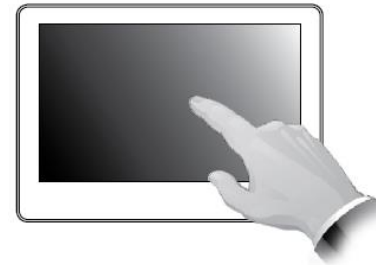

➤ Press the Aspect button to change the Image Aspect Ratio, if necessary.

Troubleshooting

➤ **No sound when using HDMI or VGA?**

- Confirm mini jack is connected to the PC.
- Confirm the volume level on the PC, projector remote control, and VC touch panel.

➤ **No Image on screen?**

- Confirm "Previewing PC" is shown on the touch screen. If not, press the **Share** icon, then press **PC**.
- Unplug and reconnect the video cable to your laptop, ensuring it is firmly connected.
- Confirm HDMI input source on remote.
- Try toggling the **VC** switch on the HDMI switcher at the AV Rack.



PLEASE DO NOT LEAVE THE PROJECTOR ON

Press the **STANDBY** button on the remote control to turn off the projector.

Contact AV Services at av@oist.jp or 11534, to request assistance or report a fault.