

How to use the Projector in C210

1 STEP ONE

CONFIRM THE AV RACK IS POWERED ON

Press the **POWER** (ON/STANDBY) button on the top AV Rack unit.

Please do not change any other settings in the AV Rack.



2 Press the **ON** button on the remote control, and tap the touch screen to wake up the system.

3 Connect your HDMI* cable.
*Use the appropriate adapter if necessary.

4 Press the **HDBaseT** button on the remote control.




HDBaseT

Troubleshooting

- **No Image on screen?**
 - Unplug and reconnect the video cable to your laptop, ensuring it is firmly connected.
 - Tap "Presentation" button on the Touch Panel to confirm video source was detected.
 - Try HDMI input source on remote. This bypasses the Cisco unit.

- **No Sound?**
Confirm the volume level for the HDMI input on the mixer located at the AV Rack.

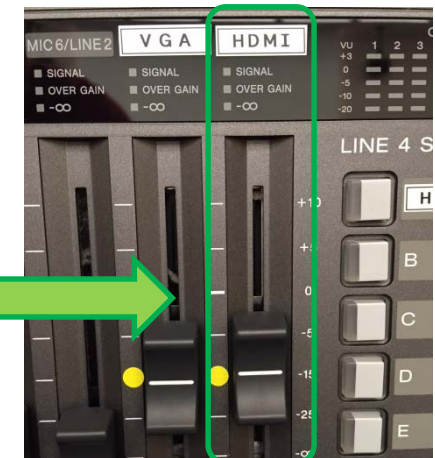

Note: There is a known issue with older Mac's (2012 and older) not being able to connect successfully.

PLEASE DO NOT LEAVE THE PROJECTOR ON

Press the **STANDBY** button on the remote control to turn off the projector.

Contact AV Services at av@oist.jp or 21534, to request assistance or report a fault.