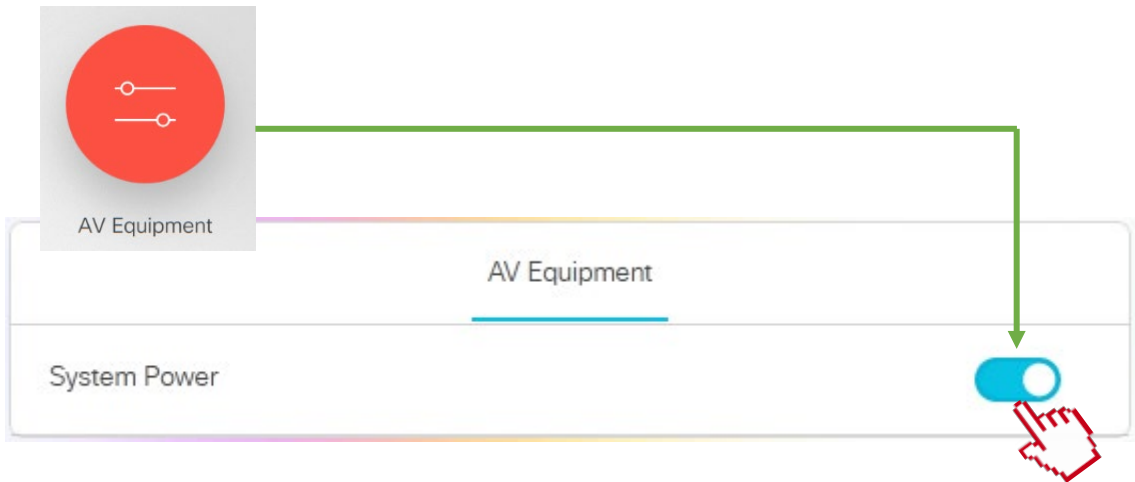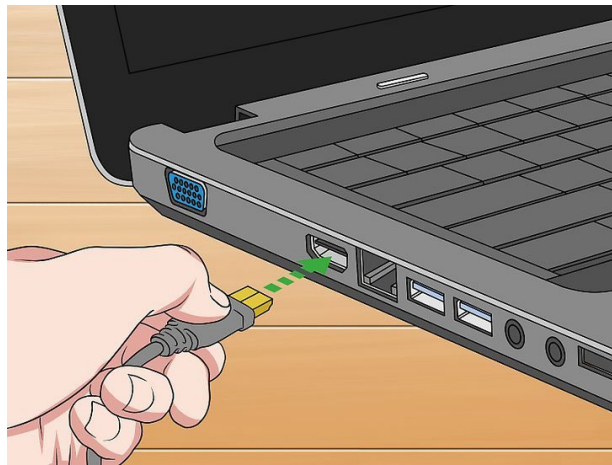# How to use the Epson Ceiling Mounted Projector

1 Tap the **AV Equipment** button on the Cisco touch panel. Toggle **System Power** to ON.
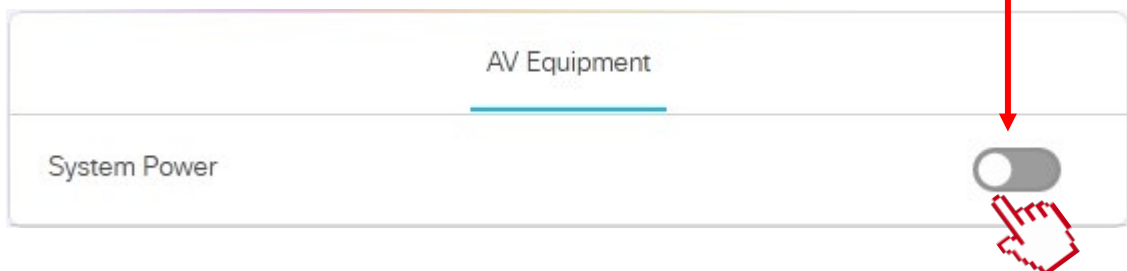

2 Connect your PC to the HDMI cable at the podium using the USB-C adapter if necessary.

Note: Cisco Proximity is also available for wireless screen sharing.

⚠ PLEASE TURN OFF SYSTEM AFTER USE

For detailed instructions of this system please refer to the manual located at the control desk.
Contact AV Services at av@oist.jp or 21534, to request assistance or report a fault.