

How to use the Projector in SH Seminar

1 STEP ONE

CONFIRM THE AV RACK IS POWERED ON

Press the **POWER** (ON/STANDBY) button on top of the AV Rack.

Please do not change any other settings in the AV Rack.



2 Press the **ON** button on the projector remote control.

3 Press the **HDMI** button on the remote control after PJ is powered.

4 Connect your PC to HDMI* cable at podium.
*Use the appropriate adapter if necessary.

VGA connection is available via VGA cable from the AV Rack.
Note: Use “VGA PC Input” channel on the video switcher.




Troubleshooting

➤ No Image on screen?

- Unplug and reconnect the video cable to your laptop, ensuring it is firmly connected.
- Confirm HDMI input source on projector remote.
- Confirm “Podium HDMI” channel is selected on the video switcher.
- If using VGA, confirm “VGA PC Input” channel is selected on the video switcher.

➤ No Sound from Source or Mic?

- Confirm the volume level for the SOURCE input on the mixer located at the AV Rack.
- Use SONY microphones instead of Shure microphones. Confirm mic volumes on mixer at AV Rack.

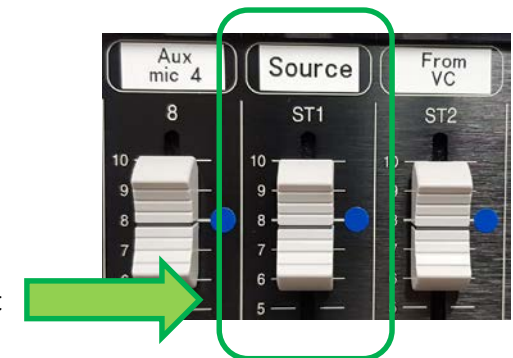

PLEASE DO NOT LEAVE THE PROJECTOR ON

Press the **STANDBY** button on the remote control to turn off the projector.

Contact AV Services at av@oist.jp or 21534, to request assistance or report a fault.